

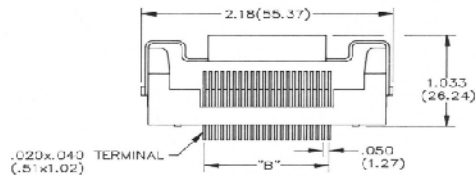
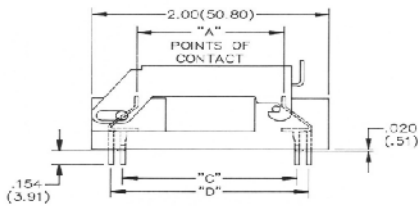
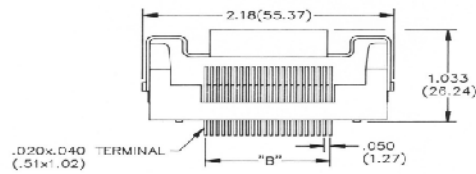


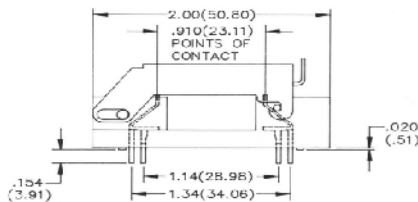

# 626 SERIES FOR 2" X 2" FLATPACK CARRIERS

- Stainless steel latch with long-lasting metal latch and hinge pins
- Beryllium Copper Alloy contacts plated with 30 microinches of gold
- Smooth, radius-probing contacts
- Latch hold down directly over the contacts prevents the carrier from bowing at elevated temperatures
- Easy loading and unloading of carrier and IC device
- For temperatures up to 150°C

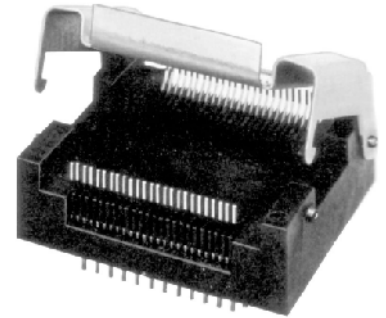

Part Number	Pin Count	Contact Material	Contact Plating	Plating Thickness	Dimensions (mm)			
					A	B	C	D
626-0400815	40	BeCu	Au/Ni	30 microinches		.950 (24.13)		
626-0440815	44	BeCu	Au/Ni	30 microinches		1.050 (26.67)		
626-0500815	50	BeCu	Au/Ni	30 microinches		1.200 (30.48)		

Special version of the Series 626 with the contacts on 1.200" or 1.8500" centers to accommodate large IC packages.

Part Number	Pin Count	Contact Material	Contact Plating	Plating Thickness	Dimensions (mm)			
					A	B	C	D
626-0400815-001	40	BeCu	Au/Ni	30 microinches	1.850 (46.99)	.950 (24.13)	1.420 (36.07)	1.620 (41.15)
626-0400815-003	40	BeCu	Au/Ni	30 microinches	1.200 (30.48)	.950 (24.13)	1.431 (36.35)	1.631 (41.43)
626-0440815-001	44	BeCu	Au/Ni	30 microinches	1.850 (46.99)	1.050 (26.67)	1.420 (36.07)	1.620 (41.15)
626-0440815-003	44	BeCu	Au/Ni	30 microinches	1.200 (30.48)	1.050 (26.67)	1.431 (36.35)	1.631 (41.43)
626-0500815-001	50	BeCu	Au/Ni	30 microinches	1.850 (46.99)	1.200 (30.48)	1.420 (36.07)	1.620 (41.15)
626-0500815-003	50	BeCu	Au/Ni	30 microinches	1.200 (30.48)	1.200 (30.48)	1.431 (36.35)	1.631 (41.43)